Aeonovalite

LucentStar™ Series 羅特斯 LTS14U 70W0

Model: LTS0-701D-WW6

70W Warm white, Suitable for outdoor

Power supply: 100 ~120V, AC-DC
Color temperature: 2700K ~ 3000K
Beam: 60°
Watt: 70W

Optical Characteristics

MEASUREMENT	VALUE
Peak wavelength (尖峰波長)(nm)	586
Dominant wavelength (主波長)(nm)	583.5927
Chromaticity Coordinates (色度坐標)(x,y)	(0.4248, 0.3965)
Correlated Color temperature (相對色溫)	3152.611
Purity (純度)(%)	50.2228
FWHM (半寬波長)(nm)	106.3197
Center wavelength (中心波長)(nm)	587
Centroid wavelength (重心波長)(nm)	586.388
CRI (演色指數)(%)	63.5852
光通量 (Φv)(lumen)	5950
VIS Radiation Power (Φe)(mW)	3500
光強度(I)(cd)	13703.25
CRI_R9	0.058

Chromaticity Diagram

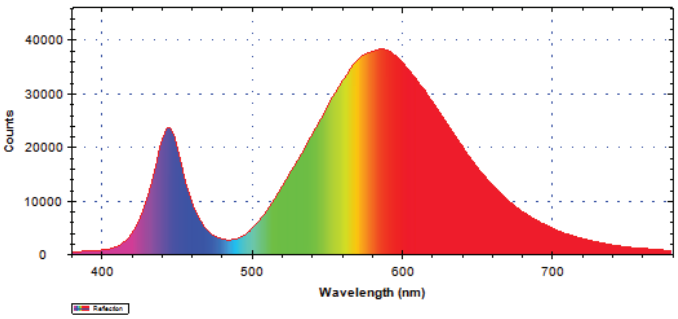

CPD

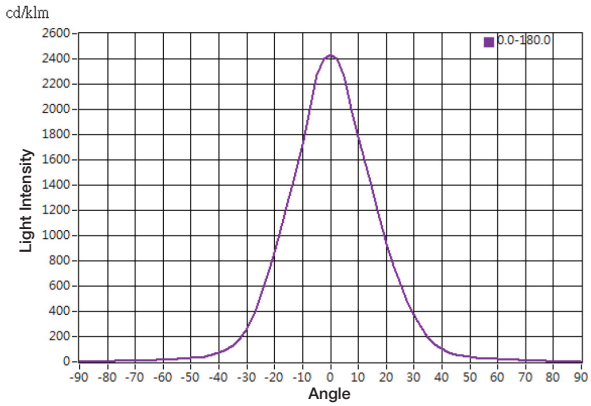

Illuminance at Distance

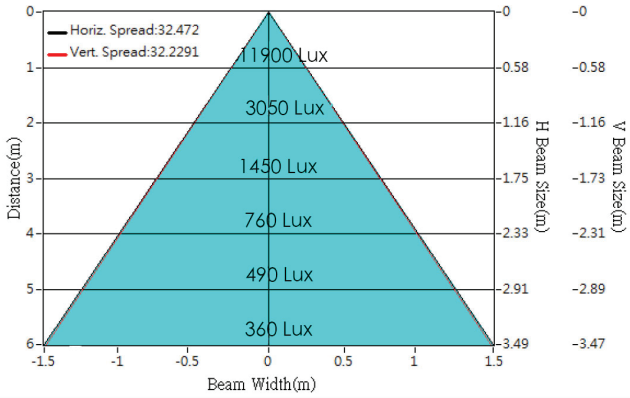

Aeonovalite Technology Inc.
ADDRESS: No.1-6, Powa Cuozi, Tamsui Dist.,
New Taipei City 25150, Taiwan (R.O.C.)
TEL: +886-2-2622-2287 | EMAIL: info@aeonovalite.com
www.aeonovalite.com

光和科股份有限公司
地址: 台灣新北市淡水區忠寮里破瓦厝子1-6號 25150
電話: +886-2-2622-2287 | EMAIL: info@aeonovalite.com
www.aeonovalite.com